


## Applications

- flooring demolition.
- concrete structure demolition.
- walling demolition.
- small rock surfacing demolition.
- open-cut excavation demolition.
- asphalt demolition.
- asphalt cutting (using special asphalt cutting spade).

## Specifications

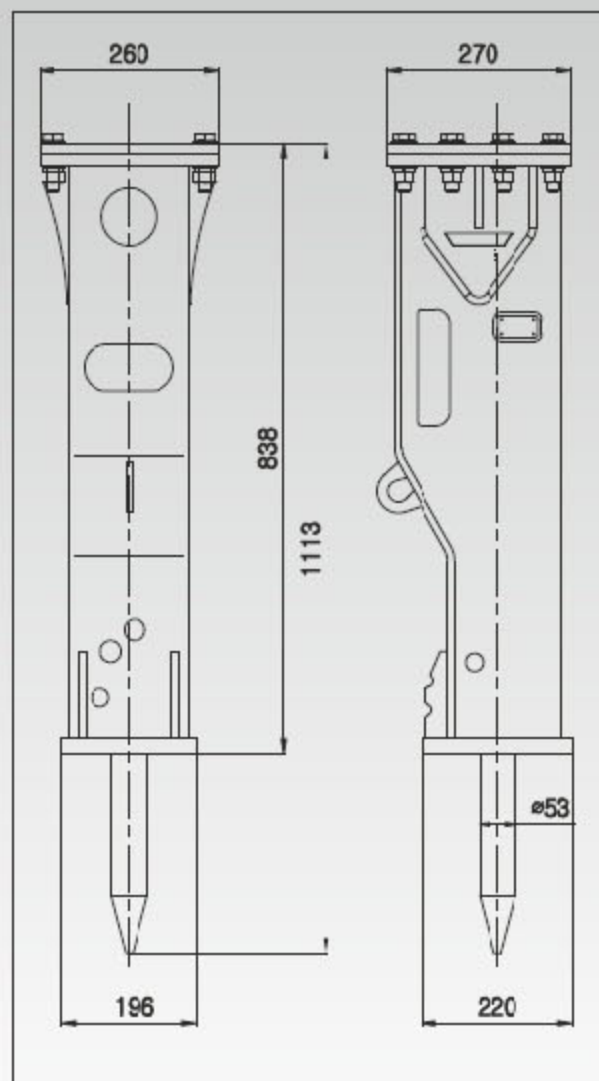

### Technical Specifications

|                               |           |
|-------------------------------|-----------|
| Working Weight (Kg)           | 225 kg    |
| Impact Frequency (BPM)        | 600 ~ 950 |
| Operating Pressure (Bar)      | 90 ~ 120  |
| Relief Pressure (Bar)         | 140 ~ 160 |
| Oil Flow (l/min)              | 25 ~ 40   |
| Back Pressure (Bar)           | 10        |
| Tool Diameter (mm)            | 53        |
| Oil Temperature (°C)          | -20 ~ +80 |
| Hydraulic Oil Viscosity (cSt) | 1000 ~ 15 |
| Pressure Line Size (mm)       | 12        |
| Return Line Size (mm)         | 12        |
| Backhead Pressure (Bar)       | 16        |
| Carrier Weight (Ton)          | 1.2 ~ 3.5 |



## ATTACHMENTS FOR SKID STEER LOADERS

